


Safety luminaire

LED emergency luminaire for antipanic lighting with min. 0,5 lux acc. to EN 1838; 2 high power LEDs, neutral white 4,000 K; lens of polycarbonate; optimum thermal management via heat sink; Ceiling recessed luminaire for 68 mm ceiling cut-out and ceiling thickness from 1 - 25 mm; tool-free rapid luminaire installation through specially shaped retaining springs; tool-free replacement of battery and control unit; Cover ring diecast aluminium, powder-coated white (close to RAL9016); Polypropylene (PP) gearbox for installation in ceiling recess; Luminaire with local battery supply for 1 hr. emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; Maintained mode: +5°C to +30°C, non-maintained mode: +5°C to +35°C; power supply: 220 - 240 V AC, 50 / 60 Hz; total power: 4.7 W; Non-maintained and maintained mode settable via jumper and NFC interface; Protection type IP40; SC1; Luminaire wired with halogen-free and silicone-free leads; Plug-in terminals for through-wiring up to 2.5 mm²; Impact strength: IK04; Room height 2.2 to 9 m; Dimensions: Ø85 x 4 mm; weight: 0.33 kg; Suitable for installing in concrete casting surround (separately ordered)




ZS_RES_F_PRO_MRCR_E1D_ANT_WH.jpg

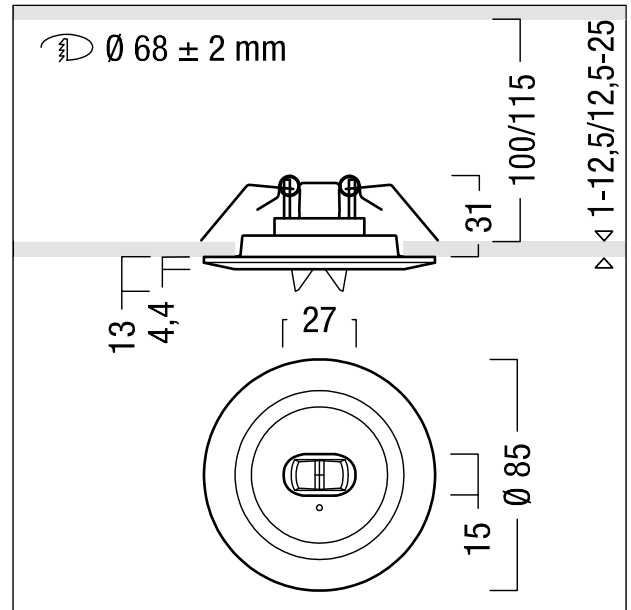

ZS_RES_M_PRO_MRCR.wmf

Light Distribution

STD - standard

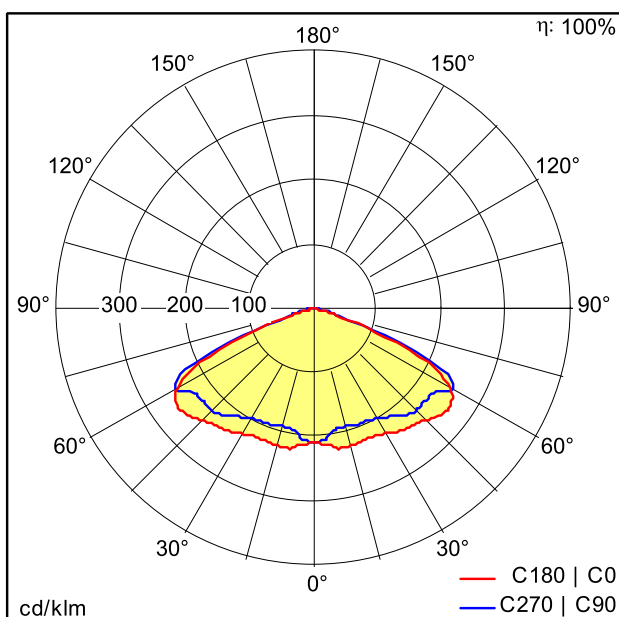

D39163AA_RESCLITE_PRO_MRCR_ANT_E1D_WH.Idt

- Light Source: LED
- Luminaire luminous flux*: 192 lm
- Luminaire efficacy*: 41 lm/W
- Ballast: 1 x 89800524 EM TR EM powerLED NTx 102 DIM 5W ZUM
- Rated median useful life*: 50000h at 25°C
- Luminaire input power*: 4.7 W Power factor = 0.7
- Standby Power*: 1.2 W
- Charging power: 1.25 W
- Service life rating: 1 h

All values marked with an * are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of color temperature: +/- 150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.