




Oprawa bezpieczeństwa

LED emergency luminaire for antipanic lighting with min. 0,5 lux acc. to EN 1838; 2 high power LEDs, neutral white 4,000 K; lens of polycarbonate; optimum thermal management via heat sink; Ceiling surface-mounted luminaire; Screw mounting of the gear tray and IP65 cover; Luminaire housing made of diecast aluminium, powder-coated white (close to RAL9016); White fibre-glass reinforced PC cover with transparent PC light outlet; Luminaire with local battery supply for 3 hr. emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; Maintained mode: +5°C to +30°C, non-maintained mode: +5°C to +35°C; power supply: 220 - 240 V AC, 50 / 60 Hz; total power: 4.7 W; Non-maintained and maintained mode settable via jumper and NFC interface; Protection type IP65; SC1; Luminaire wired with halogen-free and silicone-free leads; Plug-in terminals for through-wiring up to 2.5 mm²; Impact strength: IK04; Room height 2.2 to 9 m; Dimensions: 200 x 145 x 64 mm; weight: 0.99 kg; Luminaire with ball-proof protection




ZS_RES_F_PRO_MSC_IP65_ExD_ANT_WH.jpg

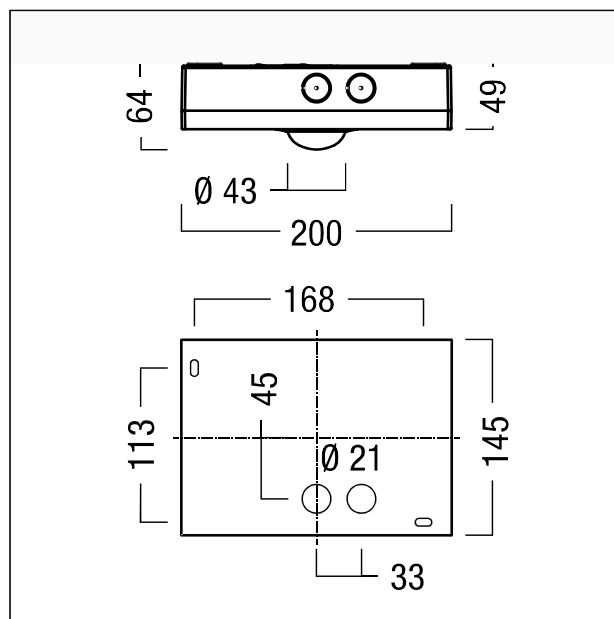

ZS_RES_M_PRO_MSC_IP65.wmf

Dystrybucja światła

STD - Standard

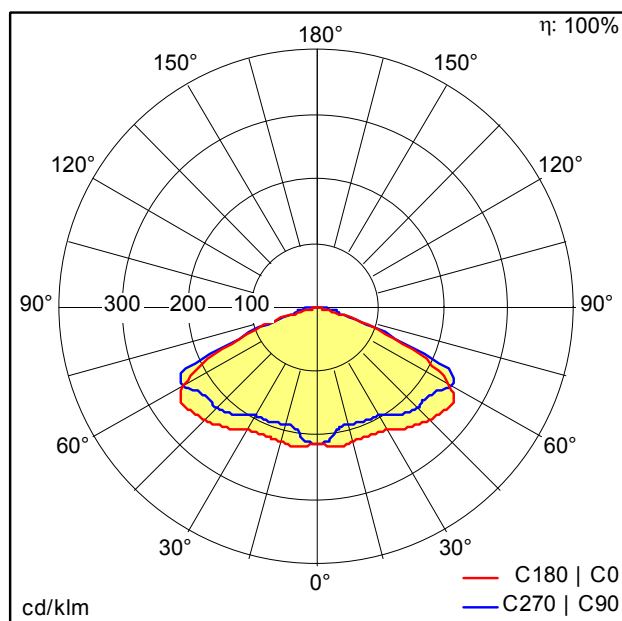

D39863AA_RESCLITE_PRO_MSC_ANT_E3D_WH_IP65.idt

- Źródło światła: LED
- Strumień świetlny oprawy*: 161 lm
- Skuteczność oprawy*: 34 lm/W
- Statecznik: 1 x 89800524 EM TR EM powerLED NTx 102 DIM 5W ZUM
- Średnia żywotność nominalna*: 50000h przy 25°C
- Moc oprawy*: 4,7 W Współczynnik mocy = 0,7
- Moc w trybie czuwania*: 1,2 W
- Wydajność ładowania: 1,25 W
- Znamionowa trwałość użytkowa: 3 h

Wartości oznaczone gwiazdką (*) są wartościami znamionowymi. Inicjalna tolerancja mocy oraz strumienia świetlnego wynosi +/-10%. Tolerancja temperatury barwowej: +/-150 K. Jeżeli nie podano inaczej, wartości te obowiązują dla temperatury 25°C

