

Oprawa znaku drogi ewakuacyjnej

LED Escape sign luminaire Luminaire with local battery supply for 1 hr. emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; surface mounted; control unit with NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; non-maintained and maintained mode settable via jumper and NFC interface; {Miscellaneous3}, {Miscellaneous2}; white polycarbonate base unit with metal clips at sides. Basic version can be fitted to ceiling without tools; plug-in terminals for through-wiring up to 2.5 mm²; no tools required to fit frameless pictogram; service life of 50000 h at constant luminous flux; Voltage supply: 220 - 240 V AC; total power: 6.6 W; 10 % dimming value in emergency mode; protection rating: IP65, class of protection: SC1; dimensions of luminaire including escape sign: 335 x 55 x 238 mm; weight: 0.49 kg, Luminaire wired with halogen-free leads; for use in environments in which the accumulation of conductive dust on the luminaire can be expected; please order escape sign separately.


Wyposażenie: ECOSIGN C SP-1L

22166881

Escape sign for ECOSIGN AB LED. Diffuser made of opal polycarbonate with additional downward light outlet and internal longitudinal prisms to help to illuminate the escape route. Escape sign printed using digital print technology. Fits onto base unit without tools. Arrow direction 1x left arrow, 1x white unprinted. Recognition distance: EN-32 m. Dimensions: 335 x 55 x 165 mm, weight: 0.65 kg




ZS_ONL_F_ECO_AB_LED_RZ_li_ges.jpg

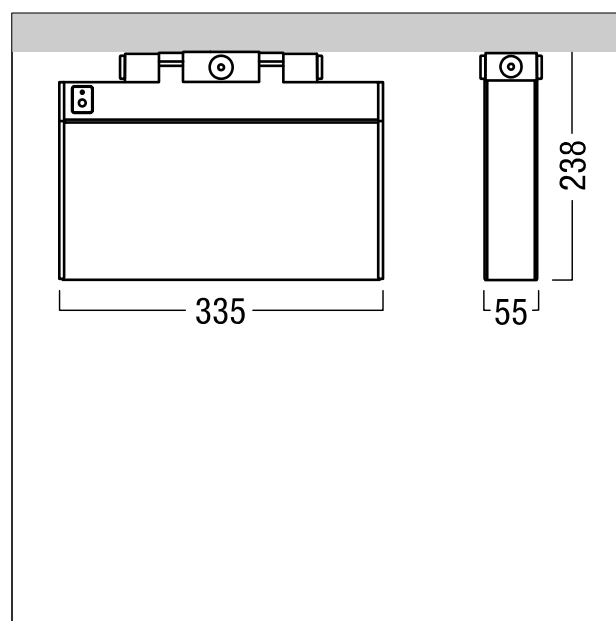

ZS_ONL_M_eco_decke.wmf

Dystrybucja światła

STD - Standard

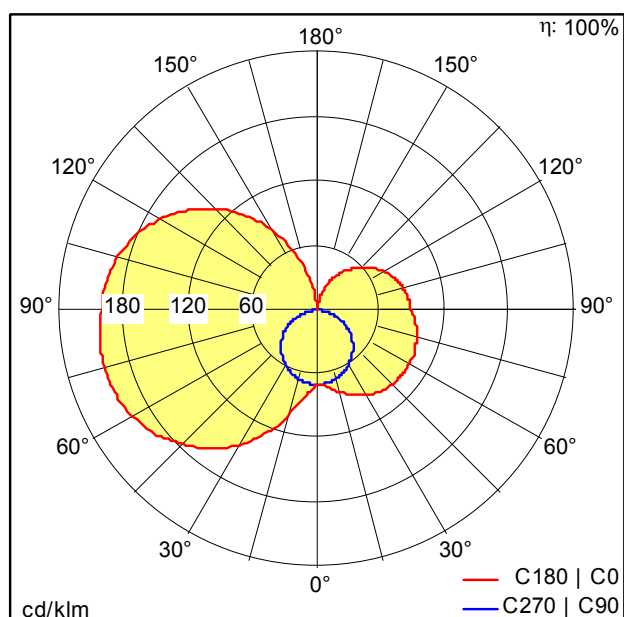

Patrz dodatkowe informacje na następnej stronie.
D35477AA_ECOSIGN_160_E1D_SP-1x.ltd

- Źródło światła: LED
- Strumień świetlny oprawy*: 191 lm
- Skuteczność oprawy*: 29 lm/W
- Statecznik: 1 x 89800524 EM TR EM powerLED NTx 102 DIM 5W ZUM
- Tolerancja miejscowa barwy (initial Mac Adam)*: 0
- Średnia żywotność nominalna*: 50000h L70 przy 25°C
- Współczynnik mocy*: 6,6 W Współczynnik mocy = 0,8
- Znamionowa trwałość użytkowa: 1 h

ECOSIGN 160 P



ZUMTOBEL

ECOSIGN 160 P MSC E1D WH IP65

42185996

Oprawa znaku drogi ewakuacyjnej