


Oprawa rynienkowa do pom. wilgotnych

LED Moisture-proof diffuser luminaire with IP66 protection rating and drip-edge effect for minimising dirt and collection of dust for maximum hygienic requirements. Total power: 34 W, Slave luminaire for DALI control (DALI only) with LED converter; patented InvisiClick for clipless mounting and opening of the cover. Cover and basic diffuser made of impact-resistant CHEMO, temperature- and UV-resistant, made as a single injection-moulded piece. LED service life lasts 50000 h before luminous flux is reduced to 90% of the initial value. Chromaticity tolerance (initial MacAdam): 3. Luminaire luminous flux: 4620 lm, Luminaire efficacy: 136 lm/W. Colour rendering $R_a > 80$, colour temperature 4000 K. Luminaire with symmetric wide light distribution (wide beam). High quality direct/indirect lighting concept for optimum lighting solutions in parking garages and industrial applications. Mounting via V2A standard spring clips to ceilings, walls or trunking. 5-pole connector terminal. Suitable for through-wiring with H05VV or NYM cable (10A). ambient temperature: -25°C to $+35^{\circ}\text{C}$. Approved for indoor use with vertical or horizontal wall mounting (see installation instructions). Note: please contact your consultant if you are planning to use the luminaire in environments with chemical pollutants, high or condensing humidity and major variations in temperature. Complies with International Food Standard specifications. Designed for BESA box. Permissible for use in environments where the deposition of conductive dust on the luminaire can be expected (EN 60598-2-24). Class of protection: SC1, 850°C glow-wire tested, resistant against ammonia and cleaning agents in FOOD industry. Luminaire wired with halogen-free leads and contains no silicone, Impact strength: IK07, Dimensions: 1100 x 90 x 92 mm; weight: 2.31 kg.




ZS_AMP_F_AMPHIBIA_WB.jpg

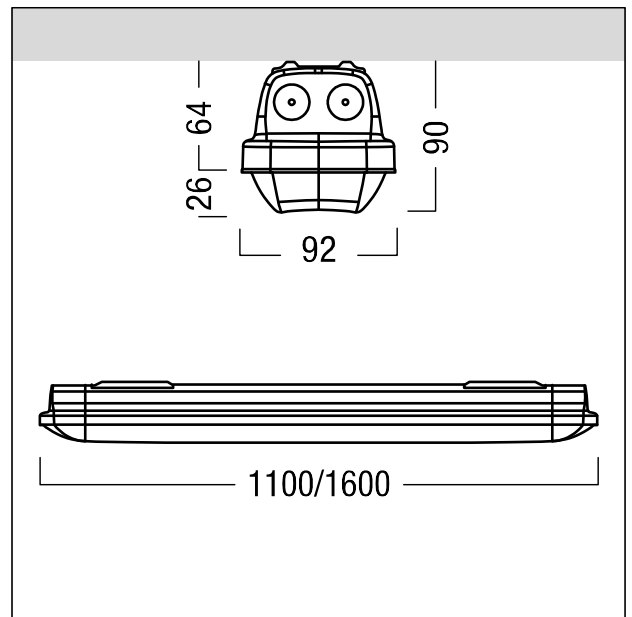

ZS_AMP_M_Amphibia.wmf

Dystrybucja światła

STD - Standard

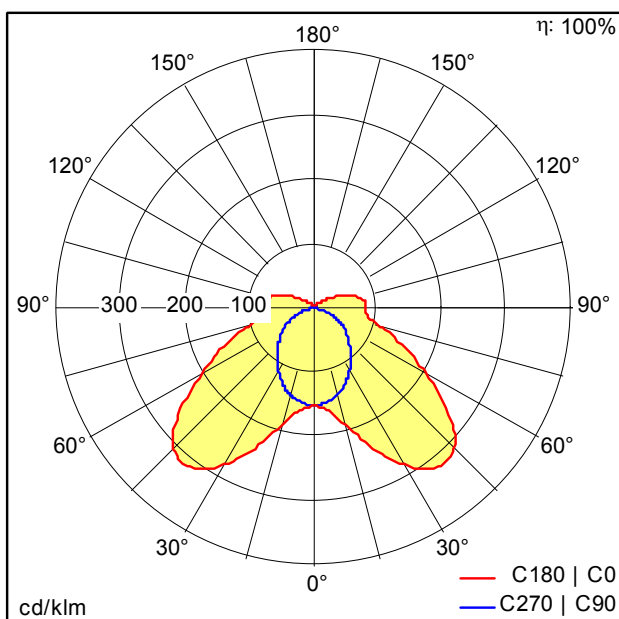

D39808AA_AMP_S_4600-840_CH_WB.ltd

- Źródło światła: LED
- Strumień świetlny oprawy*: 4620 lm
- Skuteczność oprawy*: 136 lm/W
- Współczynnik oddawania barw: 80
- Statecznik: 1 x 28000655 DRV TR LCA 50W 400mA 140V D #O4A Ip PRE
- Temperatura barwowa*: 4000 Kelvin
- Tolerancja miejscowa barwy (initial Mac Adam)*: 3
- Średnia żywotność nominalna*: 50000h L90 przy 25°C
- Moc oprawy*: 34 W Współczynnik mocy = 0,96
- Moc w trybie czuwania*: 0,2 W
- sterowanie: LDO ściemniany do 1% poprzez DALI
- Kategoria konserwacji: E - Zamknięty IP5X

Patrz dodatkowe informacje na następnej stronie.



Oprawa rynienkowa do pom. wilgotnych