



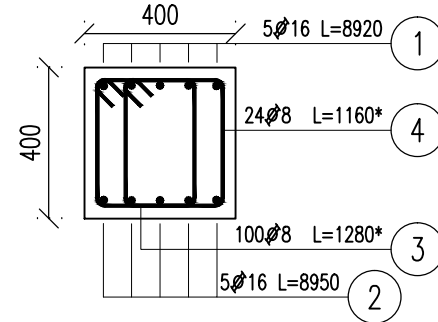


Pozycja	Ilość	Długość (mm)	w elementie	elementów	ogółem	Długość całkowita wg typów stali i sr. pręta (m)		Schemat (mm)
	Ø					A—IIIN		
						A—IIIN	Ø 8	
1	16	8920	5	1	5		44.60	
2	16	8950	5	1	5		44.75	
3	8	1280 *	100	1	100	128.00		
4	8	1160 *	24	1	24	27.84		
Długość wg średnic (m)						155.84	89.35	
Masa 1 m pręta (kg/m)						0,40	1,58	
Masa łączna wg średnic (kg)						61,56	141,17	
Masa łączna wg gatunku stali (kg)						202,73		
Ogółem (kg)						202,73		
* Średnia długość								

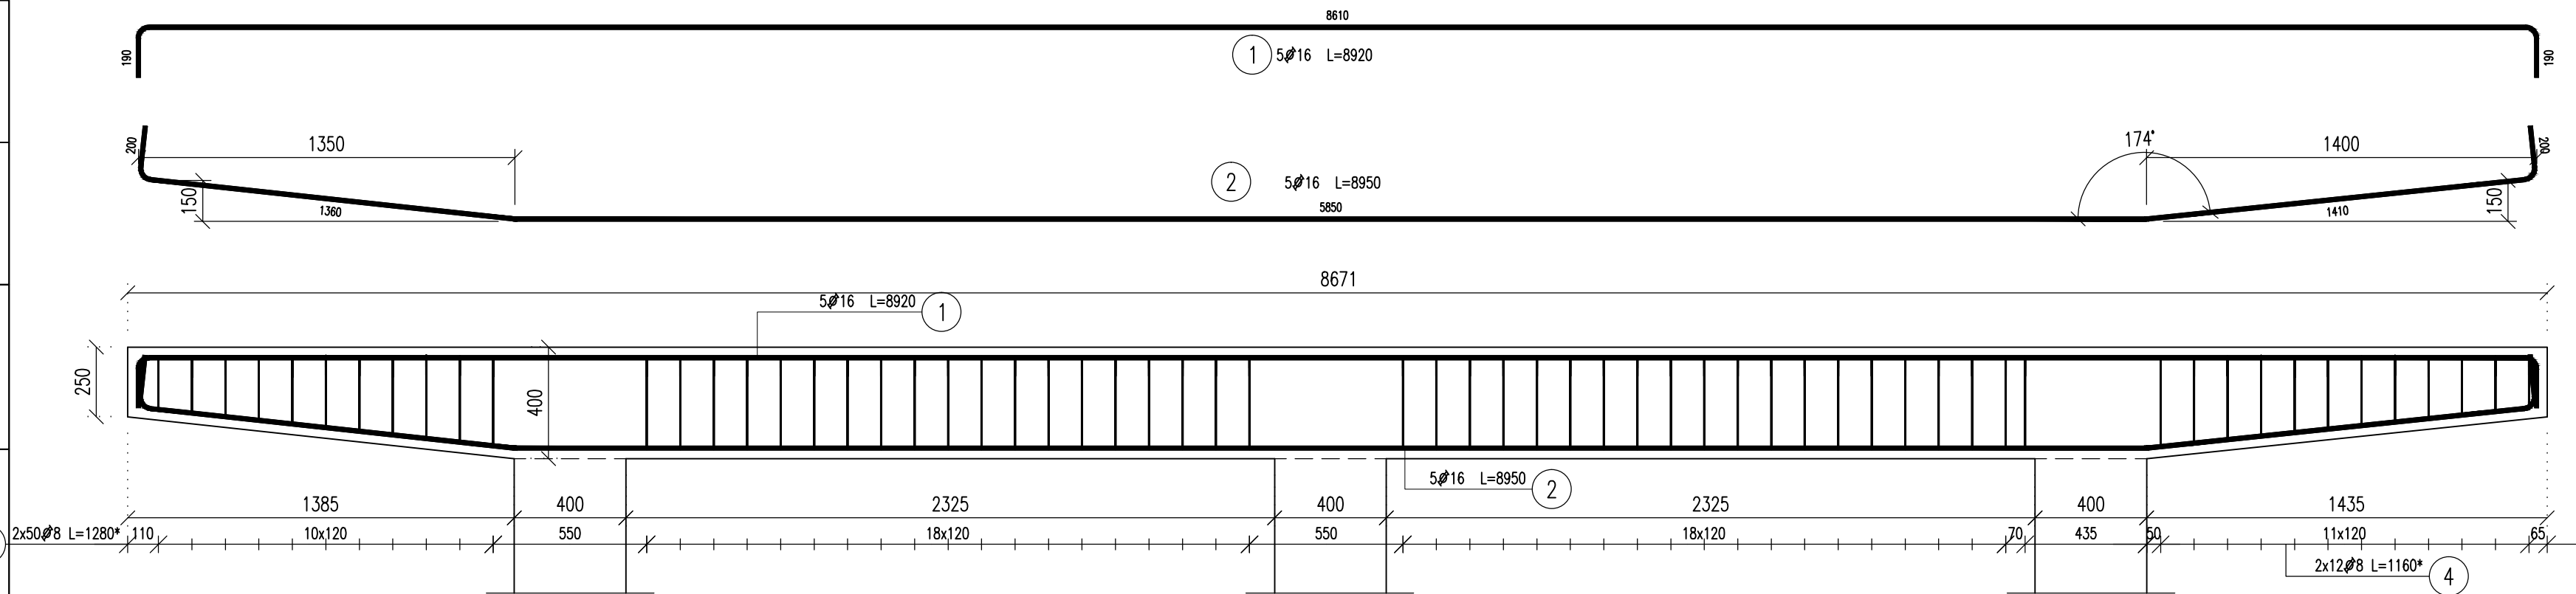

Poz.(-1).2.B6 Podciąg B6, wyk. 1x
Pozycja: (-1).2.B6

Beton C30/37
Stal A-I (ST3S)
A-IIIIN (RB 500W)

Uzupełnienie zestawienia dla strzemion o zmiennej wysokości

Pozycja	Ilość			a (mm)	Długość (mm)	Długość całkowita (m)
	w elemencie	elementów	ogółem			
3.1	1	1	1	200	1030	1.03
3.2	1	1	1	210	1050	1.05
3.3	1	1	1	230	1090	1.09
3.4	1	1	1	240	1110	1.11
3.5	1	1	1	250	1130	1.13
3.6	1	1	1	270	1170	1.17
3.7	1	1	1	280	1190	1.19
3.8	1	1	1	290	1210	1.21
3.9	1	1	1	310	1250	1.25
3.10	1	1	1	320	1270	1.27
3.11	1	1	1	330	1290	1.29
						63.88

Pozycja	Ilość			a (mm)	Długość (mm)	Długość całkowita (m)
	w elemencie	elementów	ogółem			
4.1	1	1	1	330	1290	1.29
4.2	1	1	1	320	1270	1.27
4.3	1	1	1	310	1250	1.25
4.4	1	1	1	300	1230	1.23
4.5	1	1	1	280	1190	1.19
4.6	1	1	1	270	1170	1.17
4.7	1	1	1	260	1150	1.15
4.8	1	1	1	250	1130	1.13
4.9	1	1	1	230	1090	1.09
4.10	1	1	1	220	1070	1.07
4.11	1	1	1	210	1050	1.05
						13.92